
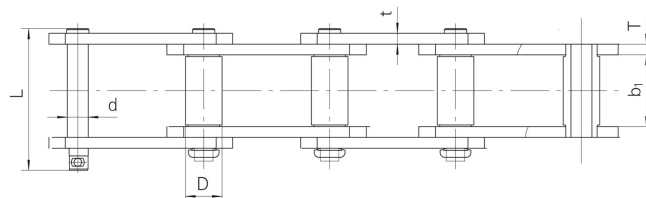


水泥工业链 Cement Industrial Chains

套筒链 Bushed Chains



链号	节距	内节内宽	套筒外径	销轴		链板		最小抗拉强度	每米重量
Chain No.	Pitch	Width between inner sidebars	Bush Diameter	Pin		Sidebar		Ultimate Tensile Strength	Weight per Meter
	P	b, (min)	D (max)	d	L	h	t/T	Fu(min)	q
	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
HS856	152.4	76.2	44.45	25.4	152.2	63.5	12.7	364.5	24.57
HS956	152.4	74.9	44.45	25.4	152.2	76.2	12.7	431.2	24.72
HS857	152.4	76.2	44.45	25.4	152.2	82.6	12.7	431.2	31.27
HS958	152.4	76.2	50.8	28.7	154.2	82.6	14.3	431.2	31.27
HS859	152.4	95.2	60.45	31.75	193.5	101.6	16	689	50.63
HS150	153.67	84.8	44.45	25.4	161.5	63.5	12.7	377.8	24.72
HS864	177.8	95.25	60.45	31.75	193.5	101.6	16	689	49.14
HS984	177.8	92.25	63.5	35.1	186.7	101.6	15.7	689	49.14