



Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米重量 Weight per meter
	P	d <sub>1 max</sub>	b <sub>1 min</sub>	d <sub>2 max</sub>	L <sub>max</sub>	L <sub>c max</sub>	Q <sub>min</sub>	Q <sub>0</sub>	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P13.7K1	13.700	8.51	7.75	4.450	16.70	19.30	17.8/4000	20.00	0.79
P14.85K1	14.850	10.16	9.40	5.080	20.70	23.30	20.0/4496	22.00	1.34
P16.7F1K1	16.700	10.16	9.40	5.080	20.70	23.30	21.8/4900	24.00	1.50
ΦP28	28.575	11.68	16.00	7.870	-	32.40	50.0/11240	55.00	2.66
ΦP28F1	28.575	11.68	16.13	7.870	-	32.40	50.0/11240	55.00	2.60
P36.67A2	36.670	11.91	12.57	5.940	25.90	28.30	31.8/7149	34.98	1.26
P38F10K1	38.000	15.88	13.00	8.280	32.50	35.50	55.0/12364	60.50	2.60
P38F11K1	38.000	15.88	13.00	8.280	30.50	33.50	45.0/10116	49.50	2.30
P38F13K1	38.000	15.88	13.00	8.280	32.50	35.50	55.0/12364	60.50	2.60
P38.1F2	38.100	22.50	13.00	8.000	29.50	33.30	40.0/8992	44.00	2.42
P38.1F25A1	38.100	18.00	15.00	8.280	36.10	39.10	68.0/15287	75.00	3.00
P38.1F25A2	38.100	23.80	15.00	8.280	36.10	39.10	68.0/15286	74.80	3.38
P38.1F31	38.100	15.88	15.75	7.920	36.20	38.90	55.0/12364	60.50	3.46
P38.1F32	38.100	15.88	15.75	7.920	36.20	38.90	55.0/12364	60.50	3.38
P39.75A1	39.750	17.25	22.00	7.800	40.50	44.30	47.0/10566	51.70	3.10
P39.75A2F2	39.750	22.23	13.00	5.940	29.20	31.00	32.0/7194	35.20	2.23
P40F12A2	40.000	22.23	13.00	5.940	29.20	31.00	32.0/7194	35.20	2.23
P41.3F9A2	41.300	22.00	11.00	9.000	28.60	31.60	40.0/8992	44.00	2.30
P41.3F14A2	41.275	22.22	12.70	5.940	29.20	31.60	30.0/6744	33.00	2.22
P42F2	42.000	11.00	13.00	6.000	30.00	32.50	50.0/11240	55.00	1.85
P42F13A1	42.010	22.23	25.40	9.530	48.50	-	55.0/12364	60.50	4.60
P42.5	42.500	15.88	15.75	7.920	32.70	36.50	56.7/12746	62.00	3.40
P44F3A2	44.000	15.88	17.02	8.280	36.10	39.10	60.0/13488	66.00	2.32
P44.45F5	44.450	25.40	16.51	7.920	36.20	38.90	35.0/7874	38.50	3.85
P44.45F7A1	44.450	28.58	15.00	9.530	34.50	38.70	45.0/10116	49.50	3.80
P44.45F12K2	44.450	25.40	25.40	12.700	54.40	59.00	170.0/38216	187.00	7.84
P44.45F15K2	44.450	25.40	25.40	12.700	60.00	-	170.0/38216	187.00	8.34
P46	46.000	16.00	16.00	8.000	36.00	39.00	55.0/12364	60.50	3.23
P49F2A1	49.000	31.00	23.00	9.800	36.60	42.00	40.0/8992	44.00	5.51
P50F3A1	50.000	31.00	15.00	9.530	35.40	38.65	83.0/18659	91.30	4.77
P50F16	50.000	24.90	10.07	7.800	26.60	28.80	30.0/7418	36.30	2.22
P50F27A1	50.000	31.00	15.00	9.800	36.60	42.00	40.0/8992	44.00	5.30
P50F42A1	50.000	29.00	15.00	9.800	36.60	42.00	40.0/8992	44.00	4.03
P50F53A2	50.000	31.00	15.50	10.000	37.10	40.00	40.0/8992	44.00	4.00

\*套筒链：表中滚子直径d1为套筒直径  
 \*Bush chain: d1 in the table indicates the external diameter of the bush.

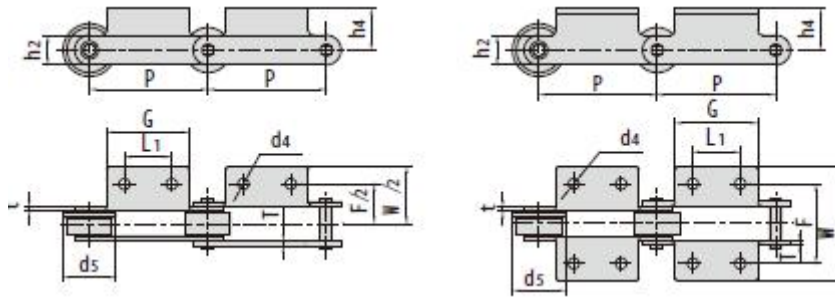

Chan No.	P	L1	G	F	W	h4	h2	d4	tT	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P13.7K1	13.700	△	9.50	29.00	38.70	7.10	11.80	4.50	1.60	-
P14.85K1	14.850	△	14.85	30.00	38.00	10.00	14.50	3.50	2.03	-
P16.7F1K1	16.700	△	12.70	31.80	44.60	10.30	14.60	5.20	2.03	-
P28	28.575	28.58	51.00	46.74	61.20	13.70	22.23	8.75	3.10	-
P28F1	28.575	28.58	50.80	46.80	61.86	12.70	22.23	9.02	3.10	-
P36.67A2	36.670	14.30	28.60	42.90	67.80	14.70	18.00	5.50	2.42	-
P38F10K1	38.000	△	30.00	49.00	79.00	16.50	21.00	8.40	3.50	-
P38F11K1	38.000	△	30.00	47.00	77.00	16.50	21.00	8.40	3.00	-
P38F13K1	38.000	△	30.00	49.00	79.00	16.50	16.50	7.00	3.50	-
P38.1F2	38.100	△	28.00	56.00	76.00	17.20	19.00	9.00	3.00	-
P38.1F25A1	38.100	△	28.00	51.00	71.00	15.00	21.00	8.40	4.00	-
P38.1F25A2	38.100	50.00	70.00	48.00	68.00	15.00	21.00	7.00	4.00	-
P38.1F31	38.100	△	61.10	54.20	81.60	14.70	23.00	8.20	4.00	-
P38.1F32	38.100	△	61.10	61.00	81.60	14.70	23.00	10.20	4.00	-
P39.75A1	39.750	△	61.00	62.10	94.10	16.50	21.25	11×8	3.50	-
P39.75A2F2	39.750	14.30	28.60	42.40	57.20	14.70	17.00	5.20	3.10	-
P40F12A2	40.000	14.30	28.60	42.90	57.20	14.70	17.00	5.20	3.10	-
P41.3F9A2	41.300	12.00	24.00	36.20	48.20	17.00	21.00	5.50	3.00	-
P41.3F14A2	41.275	14.30	28.60	42.90	61.20	14.70	17.50	5.20	3.25	-
P42F2	42.000	△	35.00	40.00	76.00	12.80	17.00	6.00	3.00	-
P42F13A1	42.010	△	31.75	60.00	84.20	18.00	28.58	8.26×16	3.25	-
P42.5	42.500	19.00	38.00	53.50	70.00	19.50	22.00	7.00	3.25	-
P44F3A2	44.000	26.00	44.00	50.80	68.00	19.10	21.00	6.60	4.15/3.10	-
P44.45F5	44.450	△	34.93	57.16	74.46	19.05	19.05	8.00	3.80	-
P44.45F7A1	44.450	△	22.00	66.00	84.80	12.80	25.60	7.00	3.00	-
P44.45F12K2	44.450	42.00	82.00	69.00	97.30	25.00	36.80	10.80	6.00/5.00	-
P44.45F15K2	44.450	42.00	82.00	69.00	97.30	25.00	36.80	10.80	6.00/5.00	-
P46	46.000	△	38.00	54.00	82.80	18.00	22.00	6.00	4.00	-
P49F2A1	49.000	△	45.00	62.00	86.00	35.00	25.00	10.00	4.00	-
P50F3A1	50.000	△	60.00	63.00	98.00	19.10	25.00	10.00	4.00	-
P50F16	50.000	△	41.30	45.00	61.40	36.00	20.00	6.50	3.00	-
P50F27A1	50.000	△	45.00	62.00	86.00	35.00	25.00	10.00	4.00	-
P50F42A1	50.000	△	29.00	55.00	72.00	12.50	25.00	7.00	4.00	-
P50F53A2	50.000	20.00	40.00	58.40	74.40	21.00	25.00	8.20	4.00	-


△附板带一个孔  
 △Attachments with 1 hole

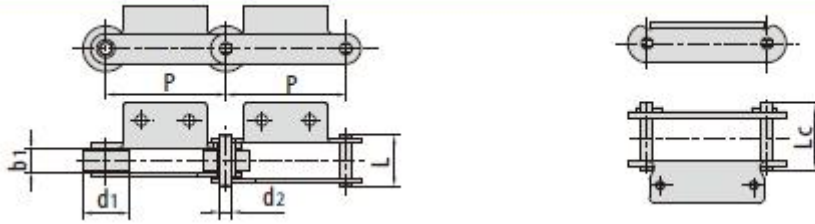

Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米重量 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q min	Qo	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P50.8F22A1-F	50.80	32.00	15.00	11.700	39.00	43.00	50.0/11240	55.00	6.13
P50.8F35A1	50.80	25.00	12.57	5.940	25.90	29.00	31.8/7150	35.00	2.20
P50.8F40	50.80	28.60	30.60	10.190	57.00	62.00	70.0/15736	77.00	7.55
P50.8F65K1	50.80	16.00	17.00	8.000	37.60	40.70	56.7/12746	62.37	3.90
P58F2A2	58.00	15.88	17.02	8.280	36.10	39.10	60.0/13488	66.00	2.46
P60A2F16	60.00	15.88	17.02	8.280	36.10	39.10	60.0/13488	66.00	2.48
P62.5A3F1	62.50	48.00	25.00	14.000	53.40	57.50	90.0/20232	99.00	10.60
P63F30K1	63.00	42.00	24.00	10.000	46.00	49.50	85.0/19108	93.50	7.67
P68.25F1	68.25	30.00	15.00	14.000	40.30	44.70	70.0/15736	77.00	4.19
P69F4A1	69.00	30.00	12.50	9.530	30.00	34.00	45.0/10116	50.00	3.18
P69F5A1	69.00	25.00	11.50	5.720	28.00	30.20	18.0/4046	19.80	2.38
P70F29	70.00	40.00	19.00	10.000	37.10	41.00	57.0/12814	62.70	4.84
P75F6	75.00	16.00	16.00	8.000	-	41.00	32.0/7200	35.20	2.44
P75F8A2	75.00	31.80	16.00	8.000	-	41.00	32.0/7200	35.20	3.52
P75F8A2-F	75.00	30.00	16.00	8.000	-	41.00	32.0/7200	35.20	3.80
P75F20A1	75.00	40.00	22.00	12.000	47.0	52.00	90.0/20232	99.00	6.81
P75F23	75.00	28.00	24.40	11.100	-	61.50	140.0/31473	154.00	4.49
P75F27A2	75.00	45.00	22.00	11.000	-	51.40	62.3/14005	68.00	7.43
P75F34A1	75.00	40.00	22.00	12.000	47.00	52.00	90.0/20232	99.00	6.71
P75F34A2	75.00	40.00	22.00	12.000	47.00	52.00	75.0/16860	82.50	6.86
P75F38K2	75.00	22.20	22.00	11.300	-	53.50	62.7/14095	69.00	4.70
P75F56A1	75.00	38.00	22.00	12.000	47.00	52.00	90.0/20232	99.00	6.04
P75F57A2	75.00	15.75	16.00	8.000	-	41.00	32.0/7194	35.20	1.82
P75F63A2	75.00	40.00	21.50	12.000	45.70	49.00	100.0/22480	110.00	6.20
*P76F1K1	76.00	32.00	35.00	16.000	-	77.00	240.0/53954	265.00	12.10
P76.2F1	76.20	31.75	15.00	14.200	-	44.20	60.0/13488	66.00	4.45
P76.2F41K1	76.20	38.10	25.40	11.100	-	57.50	80.0/17984	88.00	7.40
P76.2F42K1	76.20	38.10	25.40	11.100	-	60.70	120.0/26977	132.00	7.94
P76.2F14A3	76.20	38.10	25.40	11.100	-	56.50	85.0/19108	93.50	6.10
P76.2F43	76.20	31.74	15.88	7.940	33.10	36.20	54.5/12252	59.95	3.28
P76.2F69A2	76.20	40.00	32.00	12.500	57.90	62.30	100.0/22480	110.00	9.21
P78F2K2	78.00	32.00	37.00	15.000	-	83.20	210.0/47208	231.00	10.90
P78F3K2	78.00	32.00	37.00	18.000	-	94.00	350.0/78680	385.00	15.90
P78.1F5K2	78.10	31.75	38.10	16.460	-	95.00	250.0/56200	275.00	14.50


\*套筒链：表中滚子直径d1为套筒直径

\*Bush chain: d1 in the table indicates the external diameter of the bush.

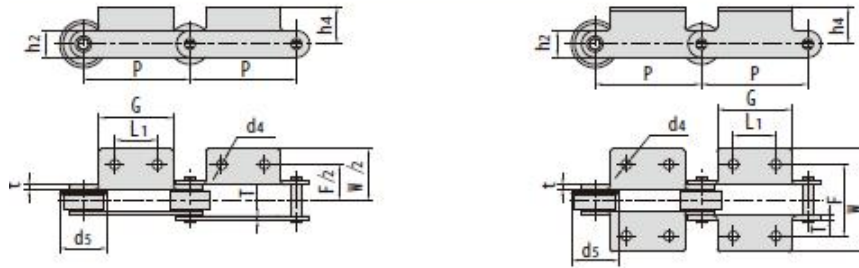


Chain No.	P	L1	G	F	W	h4	h2	d4	tT	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P50.8F22A1-F	50.80	△	45.00	75.00	110.40	20.00	26.40	9.00	4.50	40.00
P50.8F35A1	50.80	△	48.00	46.00	68.00	26.00	18.00	8.00	2.50	-
P50.8F40	50.80	-	40.00	-	90.00	22.50	30.00	-	4.50	-
P50.8F65K1	50.80	△	30.00	55.60	84.00	16.00	25.00	8.70	4.00	-
P58F2A2	58.00	26.00	44.00	66.80	84.00	19.10	21.00	6.60	4.15,3.10	-
P60A2F16	60.00	26.00	44.00	66.80	84.00	19.10	21.00	6.60	4.15,3.10	-
P62.5A3F1	62.50	40.00	65.00	90.00	130.00	26.00	35.00	11.00	5.00	-
P63F30K1	63.00	△	22.00	88.00	112.00	30.00	31.00	10.00	4.00	-
P68.25F1	68.25	40.00	70.00	54.00	84.00	21.50	27.00	8.40	4.50	-
P69F4A1	69.00	△	60.00	60.00	80.00	27.00	25.00	9.00	3.00	-
P69F5A1	69.00	△	66.00	48.00	68.00	27.00	15.00	6.50	3.00	-
P70F29	70.00	△	34.00	60.00	87.00	15.00	30.00	10.30	3.00	-
P75F6	75.00	30.00	55.00	60.00	92.00	20.00	22.00	10.00	3.00	-
P75F8A2	75.00	30.00	55.00	60.00	92.00	20.00	22.00	10.00	3.20	-
P75F8A2-F	75.00	30.00	55.00	60.00	92.00	20.00	22.00	10.00	3.20	38.00
P75F20A1	75.00	△	55.00	64.00	92.00	25.00	32.00	M 8	4.50	50.00
P75F23	75.00	40.00	60.00	88.00	118.00	37.00	30.00	9.00	6.00	-
P75F27A2	75.00	35.00	60.00	70.00	110.90	22.00	32.00	10.00	4.50,4.00	-
P75F34A1	75.00	△	55.00	70.00	90.00	25.00	32.00	M 8	4.50	50.00
P75F34A2	75.00	30.00	56.00	62.40	102.40	22.00	32.00	M 5	4.50	50.00
P75F38K2	75.00	30.00	55.00	70.00	94.00	22.00	32.00	10.00	4.50	-
P75F56A1	75.00	△	45.00	69.00	99.00	25.00	32.00	9.00	4.50	45.00
P75F57A2	75.00	30.00	55.00	66.00	98.00	19.58	22.00	10.00	3.20	-
P75F63A2	75.00	25.00	55.50	71.20	94.00	22.00	32.00	M 8	4.00	-
P76F1K1	76.00	△	50.00	109.20	149.20	35.00	50.00	11.00	6.00	-
P76.2F1	76.20	31.00	58.00	75.40	107.00	21.25	29.00	10.50	4.50	-
P76.2F41K1	76.20	△	51.00	75.00	100.00	39.55	30.20	8.60	4.80	-
P76.2F42K1	76.20	△	50.80	74.60	101.60	20.60	28.60	8.70	4.80,6.40	-
P76.2F14A3	76.20	28.60	50.80	76.20	104.60	19.10	28.60	6.40	4.80	-
P76.2F43	76.20	25.40	56.00	70.00	98.00	18.00	25.40	8.50	3.15	-
P76.2F69A2	76.20	43.00	67.40	98.20	117.00	22.70	32.80	8.80	5.00	50.00
P78F2K2	78.00	30.00	65.00	120.00	150.00	32.00	38.10	13.00	8.00	-
P78F3K2	78.00	30.00	65.00	120.00	150.00	34.00	46.00	13.00	10.00	-
P78.1F5K2	78.10	46.00	72.00	89.40	128.00	35.00	39.60	12.00	9.70	-

△附板带一个孔  
 △Attachments with 1 hole

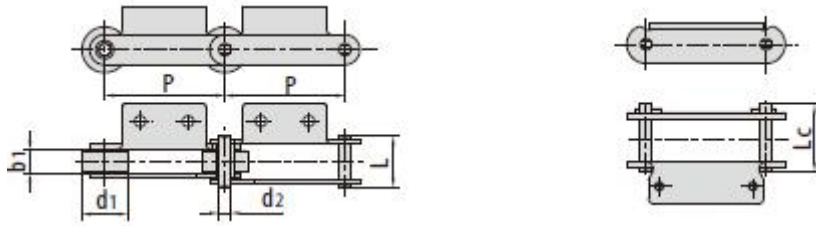


Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米重量 Weight per meter
	P mm	d1 max mm	b1 mm	d2 max mm	L max mm	Lc max mm	Q mm kN/bf	Qo kN	q kg/m
P 78.11F8	78.11	31.80	37.10	15.000	-	83.50	100.0/22480	110.00	12.05
P 78.11F9	78.11	31.75	38.10	15.875	-	90.00	90.0/20232	99.00	11.28
P 80F4	80.00	30.00	15.00	13.900	42.50	46.50	86.0/19333	95.00	3.97
P 80F4-P	80.00	45.00	15.00	13.900	42.50	46.50	86.0/19333	94.60	5.67
P 80F63A2	80.00	30.00	20.00	11.000	47.90	52.00	86.0/19333	94.60	5.30
P 85A2F1	85.00	44.45	16.00	10.000	-	56.60	90.0/20232	100.00	6.80
P 90F5A2	90.00	31.80	16.10	8.000	-	41.00	32.0/7193	35.00	2.86
P 90F8A2-GK	90.00	45.00	37.00	12.700	69.10	74.00	140.0/31472	154.00	11.90
P 95F1A2	95.00	30.00	23.00	10.000	45.50	49.50	60.0/13488	66.00	3.79
P 97.5F1	97.50	50.00	24.00	15.000	-	52.00	100.0/22480	110.00	6.51
P 100A2-F1	100.00	50.00	29.90	14.000	-	61.00	150.0/33721	165.00	9.20
P 100F1	100.00	42.00	23.00	9.530	52.00	54.30	86.7/19704	95.00	6.06
P 100F2	100.00	36.00	18.00	9.530	47.00	49.30	86.7/19704	95.00	4.60
P 100F2A2	100.00	42.00	18.00	9.530	47.00	49.30	86.7/19490	95.37	5.33
P 100F3	100.00	29.00	30.00	14.500	-	71.00	95.0/21356	105.00	9.46
P 100F4	100.00	40.00	22.00	11.300	-	53.50	65.0/14612	72.00	5.13
P 100F5	100.00	22.20	22.00	11.300	-	53.50	65.0/14612	72.00	3.90
P 100F 12	100.00	45.00	37.00	12.000	64.00	67.00	150.0/33721	165.00	10.30
P 100F 15	100.00	38.00	25.80	10.700	-	57.00	45.0/10116	50.00	5.25
P 100F 16A2-F	100.00	31.80	16.10	8.000	34.80	35.50	55.0/12364	60.50	2.68
P 100F 33	100.00	40.00	27.00	11.300	-	64.80	100.0/22480	110.00	6.80
P 100F41A2	100.00	45.00	25.40	12.700	-	63.80	80.0/17984	88.00	8.26
P 100F 50	100.00	36.00	29.00	15.000	70.00	76.00	200.0/44992	220.00	13.93
P 100F 75	100.00	26.00	22.00	10.700	-	55.00	45.0/10116	50.00	4.75
P 100F82A1	100.00	31.80	16.10	8.000	-	41.00	32.0/7193	35.20	3.07
P 100F93	100.00	40.00	22.00	11.300	-	59.50	86.0/19333	94.60	8.07
P 100F94K1	100.00	47.60	26.00	27.000	61.00	70.00	160.0/35993	176.00	12.90
P 100F95A2	100.00	32.00	14.00	11.100	32.50	36.00	60.0/13488	66.00	3.11
P 100F99K2	100.00	40.00	22.00	11.100	48.40	53.40	65.0/14612	71.50	5.54
P 100F 104	100.00	40.00	22.00	11.300	-	60.70	146.0/32822	160.60	7.33
P 100F 108K2	100.00	40.00	22.00	11.300	-	53.50	65.0/14612	71.50	5.80
P 100F 109A2	100.00	45.00	21.00	14.000	48.00	53.00	50.0/11240	55.00	6.94

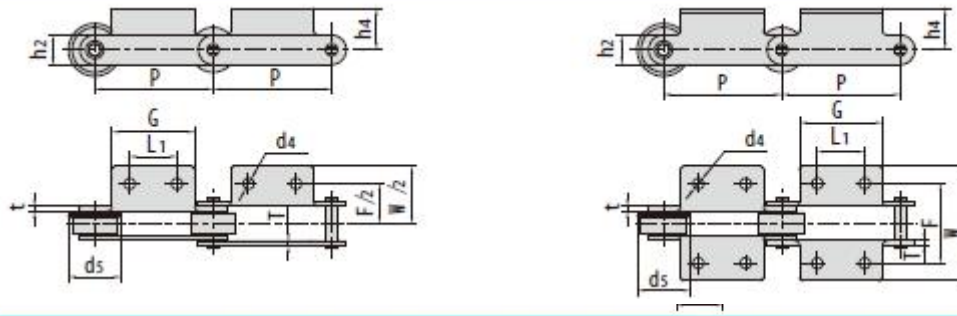

Chain No.	P	L1	G	F	W	h4	h2	d4	tT	ds
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P 78.11F8	78.11	30.00	65.00	120.00	150.00	35.00	38.10	12.00	7.90	-
P 78.11F9	78.11	38.10	116.60	104.60	133.30	31.75	38.10	14.30	7.90	-
P 80F4	80.00	40.00	70.20	57.40	87.40	22.95	27.10	8.50	5.60,4.15	-
P 80F4-P	80.00	40.00	70.20	57.40	87.40	22.95	27.10	8.50	5.60,4.15	-
P 80F63A2	80.00	40.00	70.20	62.40	92.40	22.95	27.10	8.50	5.60,4.15	40.00
P 85A2F1	85.00	30.00	50.40	95.00	125.00	22.50	35.00	9.00	4.80	-
P 90F5A2	90.00	40.00	65.00	60.00	92.00	20.00	22.00	10.00	3.20	42.00
P 90F8A2-G K	90.00	40.00	75.00	96.00	118.00	44.50	38.00	11.00	6.00	-
P 95F1A2	95.00	40.00	65.00	66.40	96.40	22.50	25.00	8.50	4.00	40.00
P 97.5F1	97.50	-	50.00	-	130.00	35.00	35.00	-	4.00	-
P 100A2-F1	100.00	40.00	65.00	98.00	128.00	35.00	40.00	10.00	4.00	65.00
P 100F1	100.00	78.00	96.00	73.00	103.00	17.50	32.00	7.00	5.00	-
P 100F2	100.00	40.00	70.00	68.00	98.00	17.50	32.00	9.00	5.00	-
P 100F2A2	100.00	40.00	70.00	68.00	98.00	17.50	32.00	9.00	5.00	-
P 100F3	100.00	40.00	70.00	100.00	128.00	28.00	38.10	12.00	6.00	-
P 100F4	100.00	40.00	65.00	70.00	94.00	22.00	32.00	10.00	4.50	-
P 100F5	100.00	40.00	65.00	70.00	94.00	22.00	32.00	10.00	4.50	-
P 100F12	100.00	60.00	90.00	98.00	128.00	34.00	40.00	11.50	5.00	64.00
P 100F15	100.00	29.85	65.00	75.00	115.60	20.00	28.00	9.00	4.80	-
P 100F16A2-F	100.00	40.00	65.00	60.00	92.00	20.00	22.00	10.00	3.20	42.00
P 100F33	100.00	40.00	65.00	78.30	102.30	24.30	32.00	10.00	6.00	50.00
P 100F41A2	100.00	40.00	70.00	80.00	126.00	25.00	31.80	12.00	6.30	60.00
P 100F50	100.00	40.00	70.00	156.00	196.00	43.00	60.00	9.00	8.00	-
P 100F75	100.00	29.85	65.00	68.00	112.00	20.00	28.00	12×9	4.80	-
P 100F82A1	100.00	△	65.00	60.00	92.00	20.00	22.00	10.00	3.20	42.00
P 100F93	100.00	40.00	70.00	100.00	124.00	30.00	32.00	100.00	6.00	-
P 100F94K1	100.00	△	35.00	85.00	116.00	38.50	55.00	13.00	7.00,5.00	-
P 100F95A2	100.00	30.00	51.00	76.00	104.00	18.00	30.00	9.00	3.00	-
P 100F99K2	100.00	40.00	65.00	70.00	104.00	22.00	32.00	9.50	4.80	-
P 100F104	100.00	40.00	65.00	70.00	104.00	23.60	32.00	10.00	6.30	-
P 100F108K2	100.00	40.00	65.00	70.00	94.00	35.00	32.00	10.00	4.50	-
P 100F109A2	100.00	40.00	60.00	110.00	130.00	17.50	35.00	6.40	5.00	-


△附板带一个孔  
 △A ttachm ents w ith 1 hole

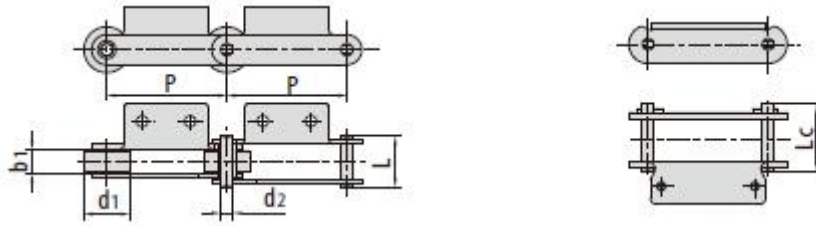

Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米重量 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q min	Qo	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
*P 100F 128K 2	100.00	32.00	45.00	16.000	-	95.00	240.5/3954	276.00	13.50
P 100F 143	100.00	40.00	24.00	11.300	-	53.50	65.0/14612	72.00	5.73
P 100F 148A 2-F	100.00	38.00	20.50	9.530	43.60	47.90	38.0/8540	43.00	3.93
P 100F 101A 2	100.00	22.20	24.00	11.100	57.50	62.70	70.0/15736	77.00	5.50
P 100F 175A 2	100.00	49.00	30.00	14.500	-	71.00	112.0/25178	123.20	-
P 100F 226K 2	100.00	31.00	14.50	10.000	37.50	41.50	80.0/17984	88.00	3.00
P 100F 233A 2	100.00	30.00	32.00	14.000	-	72.50	190.0/42712	209.00	7.65
P 100F 237A 3	100.00	40.00	33.00	10.000	56.00	61.00	85.0/19108	93.50	6.68
P 100F 241K 2	100.00	25.00	31.00	12.000	-	65.00	80.0/17984	88.00	7.52
P 100F 251K 2	100.00	29.00	30.00	14.500	-	71.00	79.0/17759	86.90	7.30
P 100F 264A 2	100.00	40.00	27.00	11.300	-	64.50	65.0/14612	71.50	7.12
P 100F 277A 2	100.00	45.00	21.00	21.000	-	60.00	120.0/26976	132.00	7.32
P 100F 281A 1	100.00	40.00	24.00	12.000	47.80	54.80	75.0/16860	82.50	6.40
R F 10100K 2	100.00	50.80	30.00	14.500	-	69.00	102.7/23087	113.00	12.60
P 100F 148A 2-F	100.00	44.50	20.50	9.530	43.60	47.90	38.0/8542	41.80	3.93
P 100F 331A 2	100.00	28.58	20.50	10.000	42.30	46.10	56.0/12589	61.60	4.10
P 100F 356A 2-F	100.00	50.00	37.00	14.000	61.80	66.00	105.0/23604	115.50	10.20
*P 101.6F 1	101.60	25.00	55.00	16.000	-	110.00	60.0/13488	66.00	11.90
P 101.6F 2A 2F 1	101.60	47.60	18.20	19.100	-	53.50	97.8/22000	107.58	7.16
P 101.6F 9	101.60	31.75	15.00	14.200	-	44.20	66.7/15159	73.00	8.40
*P 101.6F 17K 2	101.60	25.40	55.60	15.880	-	115.00	180.0/40492	198.00	12.40
*P 101.6F 17K 2F 1	101.60	25.40	55.60	15.880	-	115.00	180.0/40464	198.00	11.92
P 101.6F 18A 1	101.60	31.75	15.00	10.000	37.00	41.00	56.0/12589	61.00	3.63
*P 101.6F 18A 2	101.60	31.75	15.00	10.000	37.00	41.00	40.0/8992	44.00	3.66
P 101.6F 21	101.60	38.10	53.80	15.875	-	112.20	180.0/40492	198.00	14.90
P 101.6F 25	101.60	36.50	50.80	19.050	-	112.00	200.0/44992	220.00	18.10
P 101.6F 30A 2	101.60	38.00	22.00	10.000	-	52.80	100.0/22480	110.00	5.19
P 101.6F 35	101.60	66.70	25.00	25.400	61.00	66.00	160.0/35993	176.00	15.73
P 101.6F 36	101.60	57.15	33.40	15.880	-	92.00	180.0/40492	198.00	14.33
P 101.6F 39	101.60	57.15	33.30	16.000	82.00	89.00	127.0/28550	140.00	17.70
P 101.6F 39K 1F 1	101.60	57.15	33.30	16.000	82.00	89.00	127.0/28550	140.00	16.60
P 101.6F 40A 2	101.60	38.10	21.00	10.000	-	52.00	50.0/11240	55.00	4.69
P 101.6F 41K 1	101.60	44.50	27.00	11.300	-	67.00	78.0/17546	86.00	10.20
P 101.6F 43A 2	101.60	50.00	16.00	16.000	49.00	53.50	145.0/32620	160.00	7.95

\*套筒链：表中滚子直径d1为套筒直径


\*Bush chain: d1 in the table indicates the external diameter of the bush.

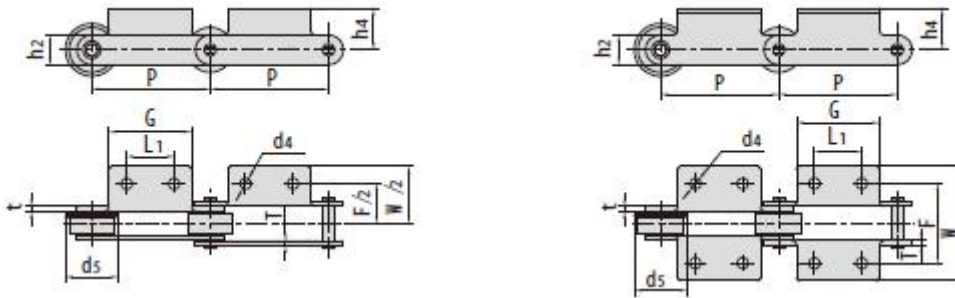


Chain No.	P	L1	G	F	W	h4	h2	d4	tT	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P 100F 128K 2	100.00	30.00	61.00	123.20	163.50	35.00	50.00	13.00	8.00	-
P 100F 143	100.00	40.00	65.00	70.00	100.00	35.00	32.00	11.00	4.00	50.00
P 100F 148A 2-F	100.00	50.00	70.00	72.00	104.00	37.00	21.00	9.00	4.00	44.50
P 100F 101A 2	100.00	41.00	65.00	86.00	134.00	24.50	33.00	9.00	6.00	-
P 100F 175A 2	100.00	40.00	70.00	100.00	128.00	28.00	38.10	M 8	6.00	-
P 100F 226K 2	100.00	35.00	70.00	65.00	98.00	35.00	25.00	9.00	4.50/4.00	-
P 100F 233A 2	100.00	40.00	70.00	80.00	112.00	31.00	40.00	10.50	6.00	-
P 100F 237A 3	100.00	56.00	100.00	108.00	144.00	31.00	32.00	12.00	4.00	-
P 100F 241K 2	100.00	50.00	90.00	100.00	132.00	35.00	42.00	12.00	5.00	-
P 100F 251K 2	100.00	40.00	70.00	100.00	128.00	28.00	38.10	12.00	6.00	-
P 100F 264A 2	100.00	40.00	65.00	75.00	99.00	22.00	32.00	10.00	6.00	-
P 100F 277A 2	100.00	40.00	80.00	70.00	110.00	31.50	35.00	13.00	6.00	-
P 100F 281A 1	100.00	△	76.00	77.00	140.00	26.00	36.00	16.60	4.00	-
R F 10100K 2	100.00	40.00	70.00	100.00	126.00	28.00	38.10	12.00	6.30	-
P 100F 148A 2-F	100.00	50.00	70.00	72.00	104.00	37.00	21.00	9.00	4.00	-
P 100F 331A 2	100.00	50.00	70.00	71.50	91.50	35.00	25.00	9.00	4.00	-
P 100F 356A 2-F	100.00	40.00	65.00	105.00	135.00	35.00	40.00	M 8	4.00	64.00
P 101.6F 1	101.60	44.00	73.00	136.00	165.00	30.00	40.00	11.00	10.00	-
P 101.6F 2A 2F 1	101.60	40.00	65.00	70.00	94.00	22.00	38.10	10.00	5.00	-
P 101.6F 9	101.60	31.00	65.00	75.40	107.00	21.25	29.00	10.50	4.50	-
P 101.6F 17K 2	101.60	44.50	84.00	136.00	172.00	25.40	38.00	11.00	10.00	-
P 101.6F 17K 2F 1	101.60	44.50	78.00	135.00	172.00	25.40	38.00	11.00	10.00	-
P 101.6F 18A 1	101.60	△	60.00	76.00	124.00	19.00	25.00	10.60	4.00	-
P 101.6F 18A 2	101.60	30.00	60.00	76.00	124.00	19.00	25.00	10.50	4.00	-
P 101.6F 21	101.60	44.50	141.20	134.90	177.80	28.70	38.10	14.00	9.65	-
P 101.6F 25	101.60	44.45	152.40	140.70	171.60	41.28	44.45	13.50	9.50	-
P 101.6F 30A 2	101.60	40.00	70.00	80.00	107.00	22.00	30.00	11.50	5.00	-
P 101.6F 35	101.60	50.00	70.00	107.00	127.00	40.00	51.00	10.00	6.00	-
P 101.6F 36	101.60	△	50.80	98.40	142.90	32.00	38.10	14.30	9.50	-
P 101.6F 39	101.60	△	50.80	101.60	146.40	31.75	38.10	14.20	9.65	-
P 101.6F 39K 1F 1	101.60	△	38.10	101.60	138.20	33.30	38.10	14.20	9.65	-
P 101.6F 40A 2	101.60	40.00	70.00	80.00	108.00	22.00	25.00	12.00	5.00	-
P 101.6F 41K 1	101.60	△	70.00	100.00	128.00	28.00	28.60	12.00	6.30	-
P 101.6F 43A 2	101.60	32.00	56.00	80.00	112.00	20.00	40.00	9.50	6.00	-

△附板带一个孔  
△Attachment with 1 hole



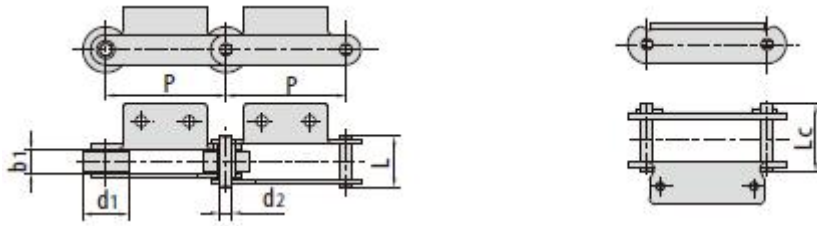

Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米重量 Weight per meter
	P	d <sub>1 max</sub>	b <sub>1 min</sub>	d <sub>2 max</sub>	L <sub>max</sub>	L <sub>c max</sub>	Q <sub>min</sub>	Q <sub>0</sub>	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P 101.6F54K 1	101.60	57.15	33.30	16.000	-	89.00	177.8/39998	197.40	17.86
P 101.6F56K 2	101.60	32.00	54.50	16.000	-	115.00	180.0/40493	199.80	16.51
P 101.6F57K 3	101.60	57.15	31.75	15.900	-	67.40	166.0/37343	191.20	13.90
P 101.6F62K 1	101.60	57.15	33.30	16.000	-	89.00	177.8/39998	197.40	18.83
P 101.6F69K 3	101.60	38.10	23.80	12.700	-	65.10	100.0/22480	110.80	8.34
P 10.16F76	101.60	57.15	31.56	16.000	56.20	62.00	82.6/18582	91.70	11.57
P 101.6F80A 2	101.60	44.50	31.60	15.900	-	81.00	130.0/29245	144.30	11.36
P 101.6F84A 2	101.60	50.80	30.23	11.180	-	62.00	80.36/18078	89.20	9.04
P 101.6F88	101.60	57.15	31.00	15.880	-	89.00	140.0/31473	160.00	18.40
P 101.6F91A 1	101.60	38.10	21.00	9.700	-	52.50	50.0/11240	55.00	5.30
P 101.6F95K 2	101.60	28.60	27.60	12.700	-	67.00	120.0/26977	132.00	6.65
P 101.6F97K 1	101.60	44.45	33.27	15.880	-	82.60	113.2/25448	125.00	13.77
P 101.6F98K 2	101.60	47.60	19.00	12.000	-	53.00	100.0/22480	110.00	6.60
P 101.6F 101K 1	101.60	57.15	33.30	16.000	-	89.00	114.0/25628	125.00	17.70
P 101.6F 115A 2	101.60	31.75	15.00	14.200	-	44.20	66.7/14994	73.37	4.42
P 101.6F 117A 2	101.60	50.00	16.00	16.000	49.00	53.50	145.0/32596	159.50	8.27
P 101.6F 121A 1	101.60	38.10	22.60	10.000	49.80	53.60	50.0/11240	55.00	5.33
P 101.6F 123K 1	101.60	28.58	30.00	14.270	-	70.10	158.0/35518	173.80	8.35
P 101.6F 128K 3	101.60	57.00	32.00	15.900	66.80	73.50	120.0/26976	132.00	13.80
P 101.6F 131A 2	101.60	50.00	33.00	16.000	66.00	70.50	145.0/32596	159.50	13.80
P 101.6F 135A 2	101.60	26.50	25.22	11.100	55.50	60.00	127.0/28550	139.70	6.18
P 101.6F 136K 2	101.60	31.75	50.80	19.050	-	112.00	200.0/44960	220.00	19.80
P 101.6F 147K 1	101.60	50.80	34.90	15.880	-	92.00	200.0/44960	220.00	14.20
P 101.6F 165A 2	101.60	57.15	33.27	15.900	-	87.50	230.0/51704	253.00	14.80
P 114.3F7A 2	114.30	63.50	31.60	15.900	-	80.40	200.0/44960	216.00	13.70
P 117	117.00	35.00	50.00	17.000	-	102.00	150.0/33721	166.50	13.40
P 120	120.00	50.00	28.00	12.000	54.00	58.00	160.0/35993	176.00	8.14
P 120A 2F4	120.00	32.00	37.00	12.700	69.10	-	140.0/31473	155.40	9.00
P 120F 14A 2	120.00	57.48	37.00	12.700	69.10	74.00	140.0/31472	151.20	13.80
P 120F 15A 1	120.00	50.00	28.00	12.000	54.00	58.00	160.0/35968	172.80	8.10
P 120F 17A 2	120.00	47.00	47.40	24.000	-	109.00	500.0/112400	540.00	25.00
P 125A 2F1	125.00	44.00	44.00	20.000	-	97.20	150.0/33720	165.00	14.33
P 125F 2	125.00	32.00	18.50	8.000	39.00	-	50.0/11240	55.00	2.66
P 125F9A 2	125.00	45.00	25.00	14.600	55.50	60.00	50.0/11240	55.00	2.58

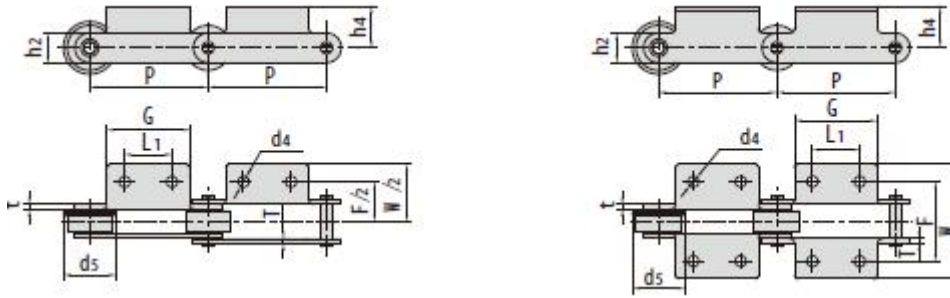


Chain No.	P	L1	G	F	W	h4	h2	d4	tT	d5
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P 101.6F54K 1	101.60	△	50.80	101.60	146.40	31.75	38.10	14.20	9.65	-
P 101.6F56K 2	101.60	45.00	81.00	142.20	179.20	32.50	45.00	11×15	10.00	-
P 101.6F57K 3	101.60	50.80	82.60	101.60	132.50	36.50	44.45	10.3/15	6.40	-
P 101.6F62K 1	101.60	△	50.80	101.60	146.40	31.75	41.30	14.20	9.65	-
P 101.6F69K 3	101.60	38.10	68.00	69.90	103.20	22.20	33.00	10.30	6.40	-
P 101.6F76	101.60	60.00	76.20	70.00	101.20	35.00	38.10	5.00	4.00	70.00
P 101.6F80A 2	101.60	40.00	80.00	110.00	146.00	35.00	38.10	15.00	8.00	-
P 101.6F84A 2	101.60	50.80	79.50	101.60	133.60	28.70	31.80	9.60	4.80	-
P 101.6F88	101.60	44.45	71.00	101.00	142.50	31.75	39.50	11.00	9.50	-
P 101.6F91A 1	101.60	△	70.00	80.00	108.00	22.00	25.00	M 10	5.00	-
P 101.6F95K 2	101.60	40.00	70.00	90.00	123.00	28.00	32.00	12.00	6.00	-
P 101.6F97K 1	101.60	△	76.20	92.00	134.80	25.40	38.10	14.20	7.90	-
P 101.6F98K 2	101.60	40.00	70.00	78.00	105.00	32.00	30.00	11.50	5.00	-
P 101.6F101K 1	101.60	△	50.80	101.60	146.40	31.75	38.10	9.70	9.65	-
P 101.6F115A 2	101.60	32.00	66.00	75.40	107.00	21.25	28.50	9.35	4.50	-
P 101.6F117A 2	101.60	32.00	56.00	93.80	125.80	20.00	40.00	9.50	6.00	-
P 101.6F121A 1	101.60	△	70.00	80.00	109.60	22.00	25.00	M 10	5.00	-
P 101.6F123K 1	101.60	△	70.00	100.00	132.60	28.00	38.10	10.00	6.40	-
P 101.6F128K 3	101.60	50.65	80.20	101.80	132.00	36.60	42.50	10.00	6.40	-
P 101.6F131A 2	101.60	32.00	56.00	97.00	129.00	20.00	40.00	12.00	6.00	-
P 101.6F135A 2	101.60	100.00	143.00	100.00	134.00	23.80	35.70	11.50	6.00	-
P 101.6F136K 2	101.60	44.45	152.40	133.40	171.60	47.63	57.15	12.70	9.50	-
P 101.6F147K 1	101.60	△	50.80	111.10	149.20	31.75	38.10	14.30	9.50	-
P 101.6F165A 2	101.60	40.00	80.00	101.60	154.00	31.00	38.10	15.50	9.70	-
P 114.3F7A 2	114.30	40.00	76.00	110.00	146.00	35.00	38.10	15.00	8.00	-
P 117	117.00	90.00	160.00	136.00	176.00	35.00	40.00	14.00	8.00	-
P 120	120.00	50.00	75.00	82.00	119.60	20.00	40.00	7.00	5.00	59.00
P 120A2F4	120.00	65.00	100.00	96.00	118.00	44.50	48.00	11.00	6.00	-
P 120F14A 2	120.00	65.00	100.00	96.00	118.00	44.50	48.00	11.00	6.00	-
P 120F15A 1	120.00	△	75.00	84.00	119.60	20.00	40.00	12.50	5.00	-
P 120F17A 2	120.00	65.00	100.00	126.40	156.40	58.00	72.00	11.00	10.00	-
P 125A2F1	125.00	50.00	80.00	118.00	160.00	43.00	50.00	14.00	8.00	-
P 125F2	125.00	46.00	76.00	64.00	90.00	14.00	22.00	10.00	3.00	42.00
P 125F9A 2	125.00	30.00	60.00	90.00	128.00	35.00	35.00	11.00	6.00,5.00	55.00


△附板带一个孔  
 △A tachment with 1 hole



# HANGZHOU OCEAN INDUSTRY CO., LTD.

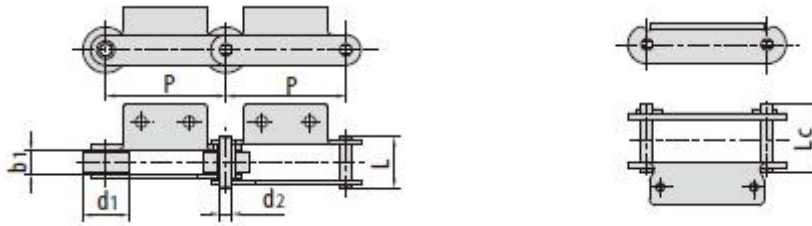

Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米重量 Weight per meter
	P mm	d1 max mm	b1 mm	d2 max mm	L max mm	Lc max mm	Q <sub>h</sub> kN/bf	Q <sub>o</sub> kN	q kg/m
P 125F 2K 2-P	125.00	32.00	18.50	8.000	-	40.00	50.0/11240	55.00	2.83
P 125F 2A 2-F	125.00	32.00	18.50	8.000	-	39.00	50.0/11240	55.00	2.34
P 125F 25K 2-P	125.00	32.00	18.50	8.000	-	49.00	60.0/13488	66.00	4.00
P 125F 28A 2	125.00	32.00	18.50	8.000	-	40.00	50.0/11240	55.00	3.13
P 125F 30A 2-F	125.00	50.00	30.00	14.500	58.10	63.00	80.0/17984	88.00	8.76
P 125F 38K 2	125.00	47.50	25.50	26.000	60.00	66.00	180.0/40464	198.00	12.12
P 125F 54A 2-F	125.00	50.00	30.00	14.500	58.10	63.00	120.0/26976	132.00	8.76
P 125F 70A 2-P	125.00	70.00	37.50	18.000	-	80.00	230.0/51704	253.00	15.40
R F 10125R-A 2	125.00	50.80	30.00	14.500	-	69.00	226.0/50805	248.60	9.67
P 125F 82K 2	125.00	32.00	29.50	14.270	-	71.50	160.0/35968	172.80	10.30
P 125F 88A 2	125.00	42.00	14.00	10.000	35.50	39.50	56.0/12589	61.60	4.40
P 130K 2F 2	130.00	80.00	40.00	24.000	77.60	88.30	200.0/44992	218.00	13.90
P 139.7F 1A 1	139.70	52.00	17.60	19.050	44.50	51.50	100.0/22480	108.00	6.02
P 150F 2	150.00	40.00	27.00	11.100	57.00	61.00	124.6/28318	137.00	5.40
P 150F 4	150.00	50.00	37.00	16.000	77.50	82.50	170.0/38243	187.00	10.90
P 150F 6	150.00	50.00	30.00	12.000	49.50	-	86.7/19704	95.00	7.27
P 150F 11A 2	150.00	46.70	21.50	15.000	46.60	51.50	130.0/29245	142.00	7.13
P 150F 13A 2	150.00	47.60	21.50	15.000	50.60	55.50	130.0/29245	142.00	8.52
P 150F 14A 2	150.00	47.60	21.50	19.000	50.60	56.50	130.0/29245	142.00	8.59
P 150F 16A 2	150.00	45.00	30.00	16.000	-	75.50	170.0/38243	187.00	8.56
P 150F 18	150.00	50.00	37.00	16.000	77.50	82.50	170.0/38243	187.00	14.49
R F 10150R A 2	150.00	50.80	30.00	14.500	69.00	-	113.0/25420	124.00	9.20
P 150F 21A 2	150.00	57.48	35.91	19.050	-	79.00	150.0/33744	166.50	11.18
P 150F 26A 2	150.00	44.50	30.00	14.500	-	69.00	113.0/25420	126.00	7.96
P 150F 31A 2	150.00	60.00	35.00	16.000	-	67.20	170.0/38243	187.00	11.10
P 150F 32A 2	150.00	44.50	27.00	11.300	-	67.00	78.0/17547	86.50	6.78
P 150F 53A 2	150.00	40.00	22.00	11.100	-	60.00	120.0/26976	132.00	6.18
P 150F 78A 1	150.00	50.00	30.90	14.500	-	70.00	150.0/33721	165.00	8.81
P 150F 85	150.00	70.00	36.00	19.000	-	94.10	160.0/35969	184.00	15.20
R F 10150R A 2-F	150.00	50.80	30.00	14.500	-	69.00	113.0/25420	124.00	9.50
P 150F 105A 2-F	150.00	50.80	30.00	14.500	-	69.00	113.0/25402	124.30	9.48
P 150F 105K 2	150.00	50.80	30.00	14.500	-	69.00	113.0/25402	124.30	8.44
P 150F 110A 2	150.00	50.80	30.00	14.500	62.50	67.60	113.0/25402	124.30	8.37
P 150F 112A 2	150.00	50.00	28.00	14.500	-	67.00	135.0/30348	148.50	8.07

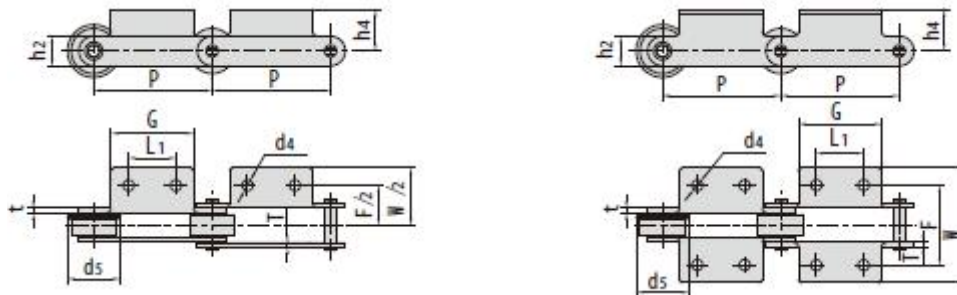




# HANGZHOU OCEAN INDUSTRY CO., LTD.

Chain No.	P	L1	G	F	W	h4	h2	d4	tT	ds
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
P 125F2K 2-P	125.00	46.00	76.00	64.00	90.00	14.00	22.00	10.00	3.00	-
P 125F2A 2-F	125.00	46.00	76.00	64.00	90.00	14.00	22.00	10.00	3.00	42.00
P 125F25K 2-P	125.00	46.00	76.00	64.00	90.00	14.00	22.00	10.00	5.00	-
P 125F28A 2	125.00	46.00	76.00	64.00	90.00	45.00	22.00	8.00	3.00	42.00
P 125F30A 2-F	125.00	50.00	80.00	96.00	135.00	35.00	35.00	11.00	5.00	64.00
P 125F38K 2	125.00	90.00	184.00	105.00	170.00	31.50	54.00	16.00	7.00,5.00	-
P 125F54A 2-F	125.00	50.00	80.00	96.00	135.00	35.00	35.00	11.00	5.00	64.00
P 125F70A 2-P	125.00	56.00	90.00	120.00	160.00	38.00	50.00	14.80	7.00,8.00	-
R F10125R -A 2	125.00	50.00	80.00	100.00	134.00	28.00	38.10	12.00	6.30	-
P 125F82K 2	125.00	50.00	80.00	100.00	132.00	29.00	38.10	12.00	6.50	-
P 125F88A 2	125.00	55.00	80.00	80.00	100.80	6.50	35.00	9.60	4.00	-
P 130K 2F2	130.00	55.00	95.00	102.00	144.00	47.50	60.00	11.00	6.00	-
P 139.7F1A1	139.70	△	40.00	80.40	109.40	31.00	40.00	15.00	5.00,4.00	-
P 150F2	150.00	60.00	85.00	92.00	117.30	22.50	32.00	10.00	6.00	-
P 150F4	150.00	60.00	85.00	120.00	150.00	33.00	43.00	14.00	8.00	-
P 150F6	150.00	50.00	75.00	86.60	126.60	17.50	35.00	9×26	4.00	59.00
P 150F11A 2	150.00	36.00	60.00	163.50	189.60	40.15	39.70	10.60	5.00	-
P 150F13A 2	150.00	36.00	60.00	164.00	193.50	52.00	40.00	11.00	6.00	-
P 150F14A 2	150.00	36.00	60.00	164.00	193.50	52.00	40.00	11.00	6.00	-
P 150F16A 2	150.00	60.00	90.00	110.00	140.00	32.00	38.00	12.00	8.00	-
P 150F18	150.00	60.00	85.00	120.00	150.00	33.00	43.00	M 10	8.00	-
R F10150R A 2	150.00	60.00	90.00	100.00	130.00	28.00	38.10	12.00	6.30	-
P 150F21A 2	150.00	26.00	45.70	100.40	129.40	58.50	44.45	10.90	6.40	-
P 150F26A 2	150.00	60.00	84.50	100.00	130.00	23.60	33.60	12.00	6.30	60.00
P 150F31A 2	150.00	60.00	90.00	100.00	139.00	28.00	35.00	11.00	6.00	66.00
P 150F32A 2	150.00	60.00	90.00	100.00	128.00	28.00	28.60	12.00	6.30	55.00
P 150F53A 2	150.00	60.00	85.00	70.00	115.00	22.00	32.00	10.00	6.00	50.00
P 150F78A 1	150.00	△	90.00	100.00	136.60	28.95	38.10	11.50	6.30	65.00
P 150F85	150.00	60.00	100.00	130.00	160.00	32.50	50.00	13.00	10.00	-
R F10150R A 2-F	150.00	60.00	90.00	100.00	130.00	28.00	38.10	12.00	6.30	65.00
P 150F105A 2-F	150.00	60.00	90.00	100.00	130.00	28.00	38.10	12.00	6.30	12.00
P 150F105K 2	150.00	60.00	90.00	100.00	130.00	28.00	38.10	12.00	6.30	-
P 150F110A 2	150.00	60.00	90.00	100.00	130.00	28.00	38.10	12.00	6.30	-
P 150F112A 2	150.00	60.00	90.00	98.00	128.00	28.00	38.10	12.00	6.30	-

△附板带一个孔

△Attachments with 1 hole

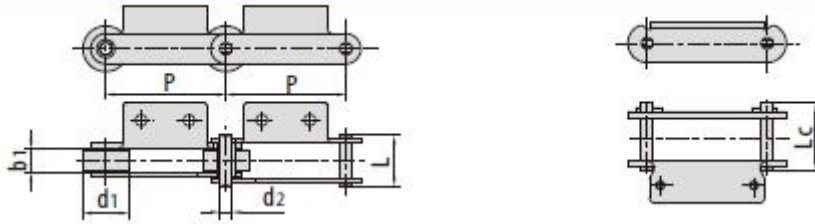

Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		抗拉强度 Tensile strength	平均抗拉强度 Average tensile strength	每米重量 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	Q min	Qo	q
	mm	mm	mm	mm	mm	mm	kN/bf	kN	kg/m
P150F121A2	150.00	50.00	30.00	14.500	-	68.00	113.0/25402	124.30	7.78
P150F137A2	150.00	60.00	42.00	15.300	74.30	81.00	180.0/40464	198.00	13.44
P150F144A2	150.00	80.00	48.00	25.000	-	105.00	450.0/101160	495.00	32.00
P152F	152.40	40.10	37.50	19.100	97.50	-	328.7/74704	378.00	15.88
P152F4	152.40	50.80	30.60	14.270	62.80	67.50	88.0/20000	100.00	9.24
P152F11	152.40	38.00	53.50	14.700	112.40	-	130.0/29245	142.00	12.60
P152F16	152.40	70.00	76.20	25.400	152.00	-	160.0/35969	176.00	41.50
P152F19	152.40	50.80	30.60	14.270	62.80	67.50	112.0/25195	123.20	9.24
P152F20	152.40	47.60	39.70	19.050	99.70	-	300.0/67487	330.00	18.33
P152F32K2	152.40	36.00	45.00	20.000	103.00	-	300.0/67487	330.00	14.93
P152F33	152.40	36.00	68.00	20.000	128.00	-	300.0/67487	330.00	16.50
P152F41A2	152.40	36.00	36.00	15.500	-	90.00	235.2/52875	258.00	10.90
P152F42K2F1	152.40	63.50	34.90	19.000	93.00	-	152.0/34193	168.90	18.80
P152F43	152.40	76.20	35.00	23.810	108.00	-	446.8/100510	513.50	27.60
P152F50	152.40	101.60	44.00	22.200	87.00	-	250.0/56240	275.00	26.70
P152F54	152.40	30.00	53.00	16.000	112.00	-	175.0/39380	193.00	11.10
P152F56	152.40	50.80	33.34	15.880	86.00	-	113.0/25420	124.30	10.70
RF6205M F6A2	152.40	65.00	37.10	15.900	88.00	-	158.0/35543	186.00	16.80
P152F78K2F1	152.40	69.85	37.60	22.230	-	97.10	400.0/89923	440.00	26.70
P152F107A2	152.40	50.80	27.60	11.100	-	70.00	110.0/24728	121.00	9.10
P152F111K2	152.40	69.85	37.10	22.230	-	111.20	413.0/92846	474.00	25.10
P152F117K2	152.40	36.00	36.00	15.500	-	90.00	232.0/52155	255.00	12.30
ΦP152F128K2	152.40	44.45	76.20	25.400	142.50	153.00	365.0/82055	401.00	36.03
P152F137A2	152.40	50.80	28.70	12.000	-	74.00	120.0/26977	132.00	8.52
RF6205M F7	152.40	65.00	37.10	15.900	-	88.00	158.0/35519	186.00	15.49
P152F144K2	152.40	40.00	37.30	19.050	-	95.00	244.6/55000	269.06	15.70
P152F168A2	152.40	38.10	36.50	15.900	-	87.50	252.7/56807	278.00	10.70
P152F176K2	152.40	36.00	36.00	15.500	-	90.00	237.0/53278	260.70	11.80
P152F180	152.40	40.10	37.50	19.100	-	97.50	370.0/83176	407.00	14.60
P152F206K2	152.40	70.00	40.00	19.000	-	98.00	220.0/49456	242.00	20.90
P152F208K2	152.40	34.90	37.10	15.900	-	88.00	220.0/49456	242.00	26.00
P152F213K2	152.40	36.00	36.00	15.500	78.00	85.00	235.2/52873	258.72	11.90
P152F227K2	152.40	75.00	37.00	19.000	-	98.00	220.0/49456	242.00	21.34
ΦP152F247K2	152.40	44.50	76.20	25.400	-	149.00	560.0/125888	616.00	28.10

\*套筒链：表中滚子直径d1为套筒直径

\*Bush chain: d1 in the table indicates the external diameter of the bush.